

AXIA 3



Engineered for performance, designed for the customer experience

With customer feedback playing a critical part in our innovative design process, we developed AXIA 3. More than a luminaire, it is a platform delivering sustainability, cost-effectiveness and customer experience all while supporting smart city frameworks. Based on experience from the hundreds of thousands AXIA luminaires installed worldwide, this third generation luminaire pushes the boundaries with photometric innovation, ease and speed of installation and FutureProof connectivity.

Available in three sizes, AXIA 3 enables towns and cities to maximise efficiency when lighting numerous environments, from bike paths, squares and car parks to residential streets, carriageways, urban roads and large boulevards. This lightweight and compact luminaire combines quality of light with a minimal carbon footprint. It excels in easy installation and carefree maintenance, reducing operating costs.



IP 66

IK 10



URBAN & RESIDENTIAL STREETS



BIKE & PEDESTRIAN PATHS



RAILWAY STATIONS & METROS



CAR PARKS



LARGE AREAS



SQUARES & PEDESTRIAN AREAS



ROADS & MOTORWAYS

Concept

AXIA 3 is a robust yet compact luminaire, designed with a focus on miniaturisation and superior efficiency. Composed of high-pressure die-cast aluminium, as well as composite materials, AXIA 3 is available in three sizes. Thanks to its reduced weight, this road luminaire is easy to handle during installation. The AXIA 3.1, which can be fitted with up to 16 LEDs, is perfectly suited to low-height applications, whereas AXIA 3.2 and 3.3, with up to 32 or 64 LEDs, are ideal for lighting urban and large roads, carriageways and avenues. The AXIA 3 range is equipped with ProFlex™ photometric engines, providing the highest efficiency thanks to their ability to maximise the lumen output and to provide very extensive light distributions.

AXIA 3 comes pre-cabled, hence there is no need to open the luminaire. The complete range is available with an integrated universal fixation part adapted for post-top and side-entry mounting on various spigots (Ø32mm with adapter, Ø42-48mm, Ø60mm and Ø76mm). The inclination angle can be adjusted on-site for both post-top (-5°/+15°) and side-entry (-10°/+10°) configurations to optimise lighting, reduce power consumption and control light pollution.

This highly efficient, cost-effective and connected-ready luminaire, offers towns and cities the ideal solution to improve lighting levels, increase safety, generate energy savings and reduce their ecological footprint. AXIA 3 is the ideal tool to provide another 25 years of efficiency, sustainability and safety.



The ProFlex™ photometric engine provides the highest efficiency.



The AXIA 3 range has a universal fixation part for spigots ranging from Ø32 to Ø76mm.

TYPES OF APPLICATION

- URBAN & RESIDENTIAL STREETS
- BIKE & PEDESTRIAN PATHS
- RAILWAY STATIONS & METROS
- CAR PARKS
- LARGE AREAS
- SQUARES & PEDESTRIAN AREAS
- ROADS & MOTORWAYS

KEY ADVANTAGES

- Maximised savings in energy and maintenance costs
- ProFlex™ photometric engines offering high efficiency lighting, comfort and safety
- 3 sizes to provide the most accurate solutions for numerous road and urban applications
- Easy installation: pre-cabled and equipped with universal fixation part adapted for side-entry and post-top mounting
- Adjustable inclination for optimised photometry and uniformity
- Connected-ready



The inclination is adjustable on-site for optimised photometry and further energy savings.



AXIA 3 is connected-ready and can operate with various sensors and control systems.



ProFlex™

The ProFlex™ photometric engine integrates the lenses into a polycarbonate protector. This integration increases the output and reduces the reflection inside the optical unit. The polycarbonate used for the ProFlex™ photometric engine offers essential characteristics such as high optical clarity for a superior light transmission, better impact resistance compared to glass and a long life span with UV-stabilisation treatment. The ProFlex™ concept enables a compact design with a thin optical compartment. It provides extensive light distributions so that the spacing between the luminaires can be increased.






Custom dimming profile

Intelligent luminaire drivers can be programmed with complex dimming profiles. Up to five combinations of time intervals and light levels are possible. This feature does not require any extra wiring.

The period between switching on and switching off is used to activate the preset dimming profile. The customised dimming system generates maximum energy savings while respecting the required lighting levels and uniformity throughout the night.

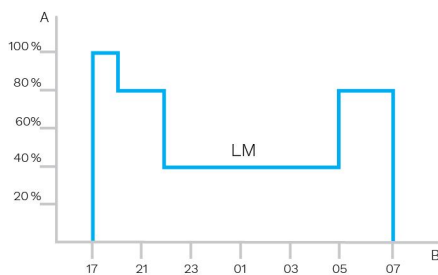


A. Dimming level | B. Time



Daylight sensor / photocell

Photocell or daylight sensors switch the luminaire on as soon natural light falls to a certain level. It can be programmed to switch on during a storm, on a cloudy day (in critical areas) or only at nightfall so as to provide safety and comfort in public spaces.

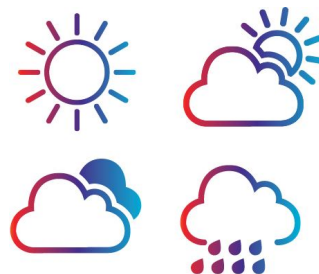

PIR sensor: motion detection

In places with little nocturnal activity, lighting can be dimmed to a minimum most of the time. By using passive infrared (PIR) sensors, the level of light can be raised as soon as a pedestrian or a slow vehicle is detected in the area.

Each luminaire level can be configured individually with several parameters such as minimum and maximum light output, delay period and ON/OFF duration time. PIR sensors can be used in an autonomous or interoperable network.





Cost-effective solution

A Zhaga-D4i certified luminaire includes drivers offering features that had previously been in the control node, like energy metering, which has in turn simplified the control device therefore reducing the price of the control system.


The Zhaga consortium joined forces with the DiiA and produced a single Zhaga-D4i certification that combines the Zhaga Book 18 version 2 outdoor connectivity specifications with the DiiA's D4i specifications for intra-luminaire DALI.

Standardisation for interoperable ecosystems

As a founding member of the Zhaga consortium, Schröder has participated in the creation of, and therefore supports, the Zhaga-D4i certification program and the initiative of this group to standardise an interoperable ecosystem. The D4i specifications take the best of the standard DALI2 protocol and adapt it to an intra-luminaire environment but it has certain limitations. Only luminaire mounted control devices can be combined with a Zhaga-D4i luminaire. According to the specification, control devices are limited respectively to 2W and 1W average power consumption.

Certification program

The Zhaga-D4i certification covers all the critical features including mechanical fit, digital communication, data reporting and power requirements within a single luminaire, ensuring plug-and-play interoperability of luminaires (drivers) and peripherals such as connectivity nodes.

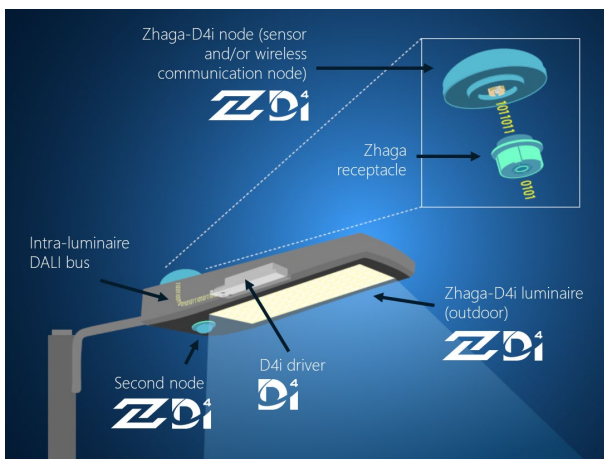



Schröder EXEDRA is the most advanced lighting management system on the market for controlling, monitoring and analysing streetlights in a user-friendly way.



Tailored experience

Schröder EXEDRA includes all advanced features needed for smart device management, real-time and scheduled control, dynamic and automated lighting scenarios, maintenance and field operation planning, energy consumption management and third-party connected hardware integration. It is fully configurable and includes tools for user management and multi-tenant policy that enables contractors, utilities or big cities to segregate projects.

A powerful tool for efficiency, rationalisation and decision making

Data is gold. Schröder EXEDRA brings it with all the clarity managers need to drive decisions. The platform collects massive amounts of data from end devices and aggregates, analyses and intuitively displays them to help end-users take the right actions.

Protected on every side

Schröder EXEDRA provides state-of-the-art data security with encryption, hashing, tokenisation, and key management practices that protect data across the whole system and its associated services.

Standardisation for interoperable ecosystems

Schröder plays a key role in driving standardisation with alliances and partners such as uCIFI, TALQ or Zhaga. Our joint commitment is to provide solutions designed for vertical and horizontal IoT integration. From the body (hardware) to the language (data model) and the intelligence (algorithms), the complete Schröder EXEDRA system relies on shared and open technologies.

Schröder EXEDRA also relies on Microsoft™ Azure for cloud services, provided with the highest levels of trust, transparency, standards conformance and regulatory compliance.

Breaking the silos

With EXEDRA, Schröder has taken a technology-agnostic approach: we rely on open standards and protocols to design an architecture able to interact seamlessly with third-party software and hardware solutions. Schröder EXEDRA is designed to unlock complete interoperability, as it offers the ability to:

- control devices (luminaires) from other brands
- manage controllers and to integrate sensors from other brands
- connect with third-party devices and platforms

A plug-and-play solution

As a gateway-less system using the cellular network, an intelligent automated commissioning process recognises, verifies and retrieves luminaire data into the user interface. The self-healing mesh between luminaire controllers enables real-time adaptive lighting to be configured directly via the user interface.

GENERAL INFORMATION

Recommended installation height	4m to 12m 13' to 39'
Driver included	Yes
CE mark	Yes
ENEC certified	Yes
ENEC+ certified	Yes
ROHS compliant	Yes
Zhaga-D4i certified	Yes
Testing standard	LM 79-08 (all measurements in ISO17025 accredited laboratory)

HOUSING AND FINISH

Housing	Aluminium Composite materials
Optic	Polycarbonate
Protector	Polycarbonate (with integrated lenses)
Housing finish	Polyester powder coating
Standard colour(s)	RAL 7040 window grey RAL 9005 Jet black
Tightness level	IP 66
Impact resistance	IK 10
Vibration test	Compliant with modified IEC 68-2-6 (0.5G)

OPERATING CONDITIONS

Operating temperature range (Ta)	-30°C up to +45°C / -22°F up to 113°F
----------------------------------	---------------------------------------

· Depending on the luminaire configuration. For more details, please contact us.

ELECTRICAL INFORMATION

Electrical class	Class I EU, Class II EU
Nominal voltage	220-240V – 50-60Hz
Power factor (at full load)	0.9
Surge protection options (kV)	10
Electromagnetic compatibility (EMC)	EN 55015 / EN 61000-3-2 / EN 61000-4-5 / EN 61547
Control protocol(s)	DALI
Control options	Bi-power, Custom dimming profile, Photocell, Remote management
Socket	Zhaga (optional) NEMA 3-pin (optional) NEMA 6-pin (optional) NEMA 7-pin (optional)
Associated control system(s)	Schröder EXEDRA
Sensor	PIR (optional)

OPTICAL INFORMATION

LED colour temperature	2700K (WW 727) 3000K (WW 730) 4000K (NW 740)
Colour rendering index (CRI)	>70 (WW 727) >70 (WW 730) >70 (NW 740)
ULOR	0%
ULR	0%

· ULOR may be different according to the configuration. Please consult us.


· ULR may be different according to the configuration. Please consult us.

LIFETIME OF THE LEDS @ TQ 25°C


All configurations	100,000h - L90
--------------------	----------------

DIMENSIONS AND MOUNTING


AxBxC (mm inch)	AXIA 3.1 - 513x130x191 20.2x5.1x7.5 AXIA 3.2 - 585x130x191 23.0x5.1x7.5 AXIA 3.3 - 550x130x277 21.7x5.1x10.9
Weight (kg lbs)	AXIA 3.1 - 3.6 7.9 AXIA 3.2 - 4.8 10.6 AXIA 3.3 - 6 13.2
Aerodynamic resistance (CxS)	AXIA 3.1 - 0.03 AXIA 3.2 - 0.03 AXIA 3.3 - 0.04
Mounting possibilities	Side-entry slip-over - Ø32mm Side-entry slip-over - Ø42mm Side-entry slip-over - Ø48mm Side-entry slip-over - Ø60mm Post-top slip-over - Ø60mm Post-top slip-over - Ø76mm

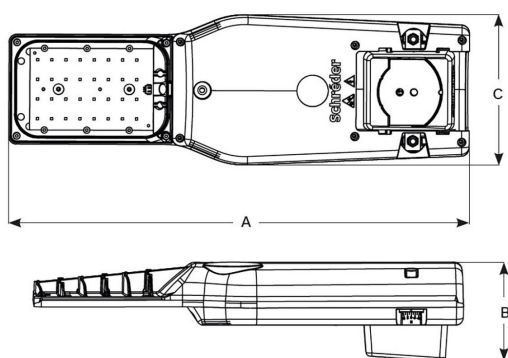

AXIA 3 | Post-top - Slip-over mounting for
Ø60 or Ø76mm spigot - 2xM10 screws

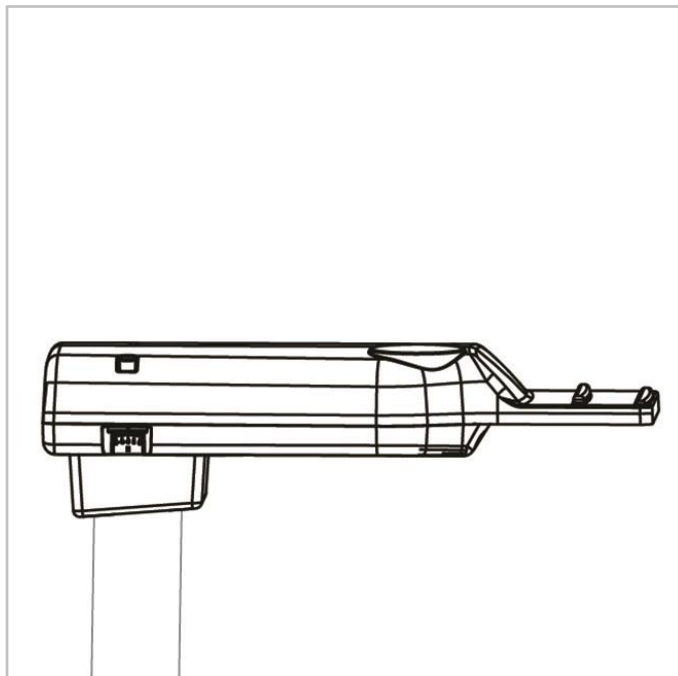

AXIA 3 | Side-entry - Slip-over mounting for
Ø32 (with accessory) or Ø42-60mm spigot -
2xM10 screws

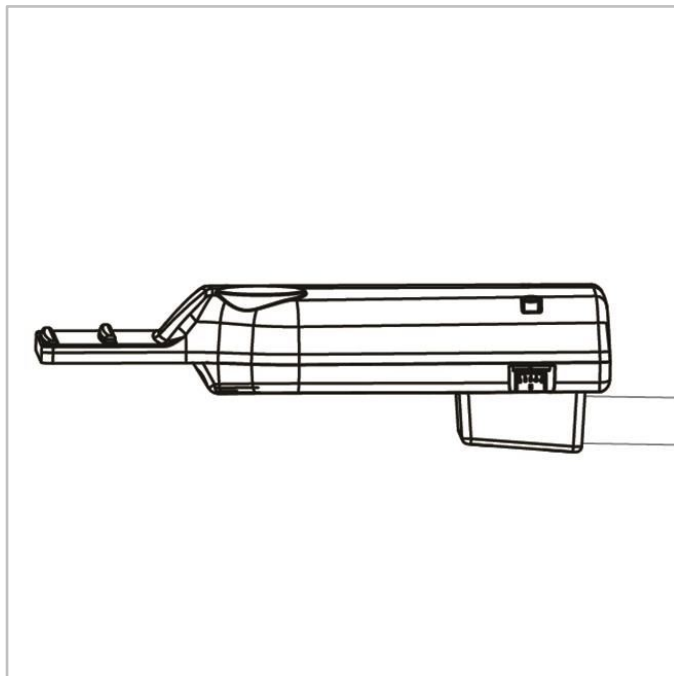



			Luminaire output flux (lm) Warm White 727		Luminaire output flux (lm) Warm White 730		Luminaire output flux (lm) Neutral White 740		Power consumption (W)	Luminaire efficacy (lm/W)	
Luminaire	Number of LEDs	Current (mA)	Min	Max	Min	Max	Min	Max	Up to		Photometry
AXIA 3.1	8	300	600	1000	700	1000	700	1100	8.4	131	
	8	400	800	1300	900	1400	900	1500	11	136	
	8	600	1200	1900	1300	2000	1300	2100	16.6	127	
	8	700	1400	2100	1400	2200	1500	2400	19.4	124	
	8	850	1600	2500	1700	2600	1800	2800	22.8	123	
	16	200	900	1400	900	1400	1000	1500	11.2	134	
	16	300	1300	2000	1400	2100	1500	2300	16.1	143	
	16	480	2000	3100	2100	3300	2300	3500	25.5	137	
	16	500	2100	3200	2200	3400	2300	3600	25.5	141	
	16	600	2400	3800	2600	4000	2700	4200	30.8	136	
	16	700	2800	4300	2900	4500	3100	4800	35.6	135	
	16	870	3300	5100	3500	5400	3700	5700	44	130	

Tolerance on LED flux is $\pm 7\%$ and on total luminaire power $\pm 5\%$




			Luminaire output flux (lm) Warm White 727		Luminaire output flux (lm) Warm White 730		Luminaire output flux (lm) Neutral White 740		Power consumption (W)	Luminaire efficacy (lm/W)	
Luminaire	Number of LEDs	Current (mA)	Min	Max	Min	Max	Min	Max	Up to		Photometry
AXIA 3.2	24	200	2000	2100	2100	2200	2200	2300	15.3	150	
	24	300	2900	3000	3100	3200	3300	3400	22.4	152	
	24	400	3800	3900	4000	4100	4300	4400	29.7	148	
	24	500	4600	4800	4900	5000	5200	5400	37.2	145	
	24	590	5400	5500	5600	5800	6000	6200	44	141	
	24	700	6200	6400	6500	6700	6900	7100	52.5	135	
	24	800	6800	7100	7200	7400	7600	7900	60	132	
	24	900	7500	7700	7800	8100	8400	8700	67.5	129	
	24	1000	8100	8400	8500	8800	9000	9300	75	124	
	32	200	2700	2800	2800	2900	3000	3100	19.8	157	
	32	300	3900	4100	4100	4300	4400	4500	29.5	153	
	32	450	5700	5900	5900	6200	6300	6600	44.5	148	
	32	500	6200	6400	6500	6700	6900	7200	49	147	
	32	600	7300	7500	7600	7900	8100	8400	59	142	
	32	700	8200	8500	8600	8900	9200	9500	69	138	
	32	800	9100	9500	9600	9900	10200	10600	78	136	


Tolerance on LED flux is $\pm 7\%$ and on total luminaire power $\pm 5\%$



			Luminaire output flux (lm) Warm White 727		Luminaire output flux (lm) Warm White 730		Luminaire output flux (lm) Neutral White 740		Power consumption (W)	Luminaire efficacy (lm/W)	
Luminaire	Number of LEDs	Current (mA)	Min	Max	Min	Max	Min	Max	Up to		Photometry
AXIA 3.3	48	200	4000	4200	4200	4400	4500	4600	28.6	161	
	48	300	5900	6100	6200	6400	6600	6800	42.5	160	
	48	400	7600	7900	8000	8300	8500	8900	57	156	
	48	550	10000	10400	10500	10900	11200	11600	79	147	
	48	600	10700	11200	11300	11700	12000	12500	86	145	
	48	700	12100	12600	12700	13200	13500	14100	100	141	
	48	800	13300	13900	14000	14600	14900	15500	115	135	
	48	880	14200	14800	14900	15600	15900	16600	129	129	
	64	200	5300	5600	5600	5800	6000	6200	37.7	164	
	64	300	7800	8200	8200	8600	8800	9100	56.5	161	
	64	420	10600	11100	11200	11600	11900	12400	79	157	
	64	500	12300	12900	13000	13500	13800	14400	94	153	
	64	600	14300	14900	15000	15700	16000	16700	113	148	
	64	700	16200	16800	17000	17700	18100	18800	137	137	
	64	880	19000	19800	19900	20800	21200	22100	172	128	

Tolerance on LED flux is $\pm 7\%$ and on total luminaire power $\pm 5\%$

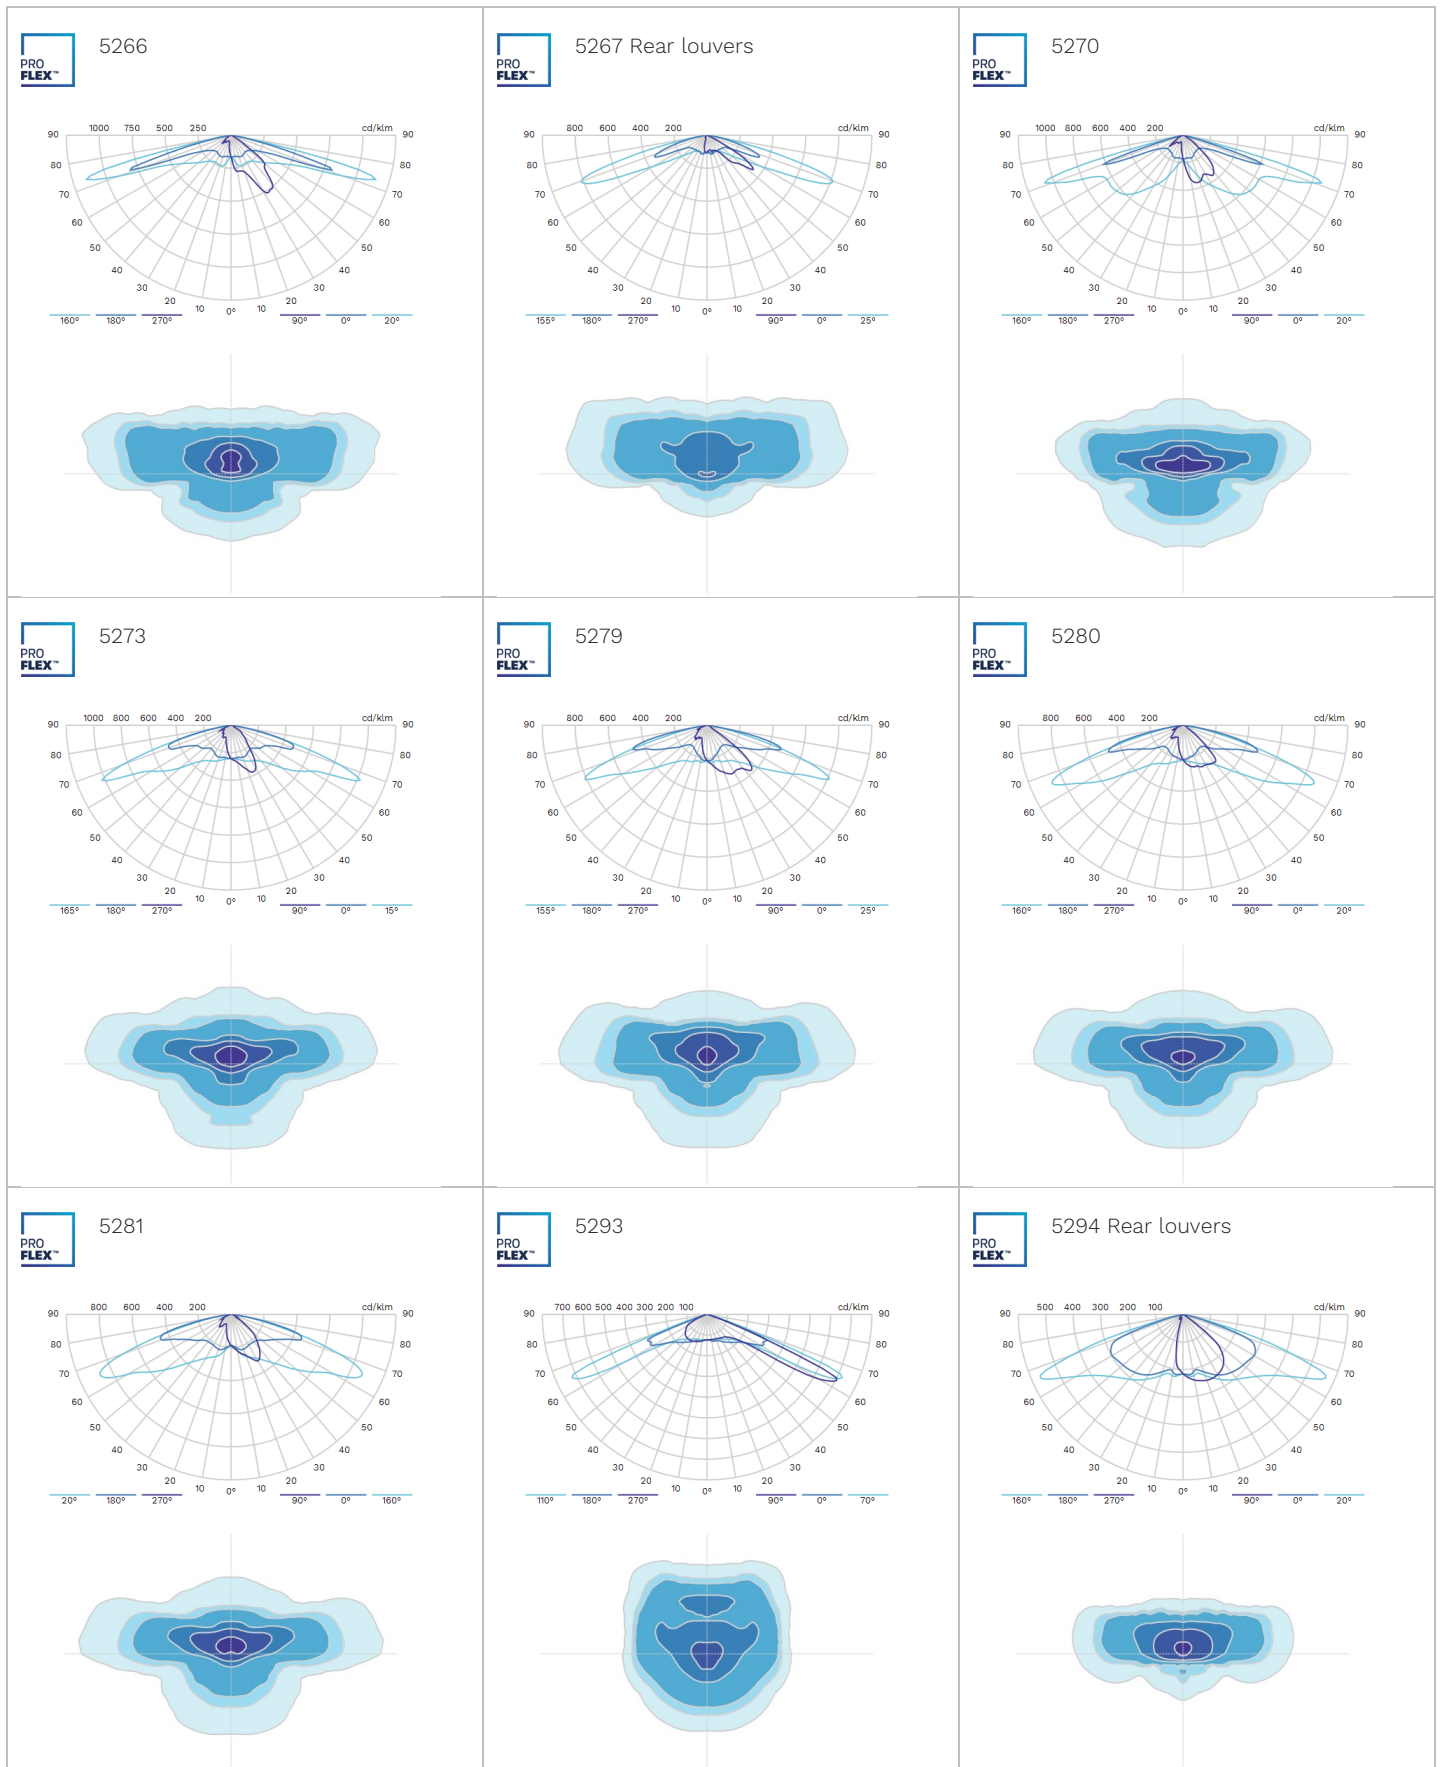

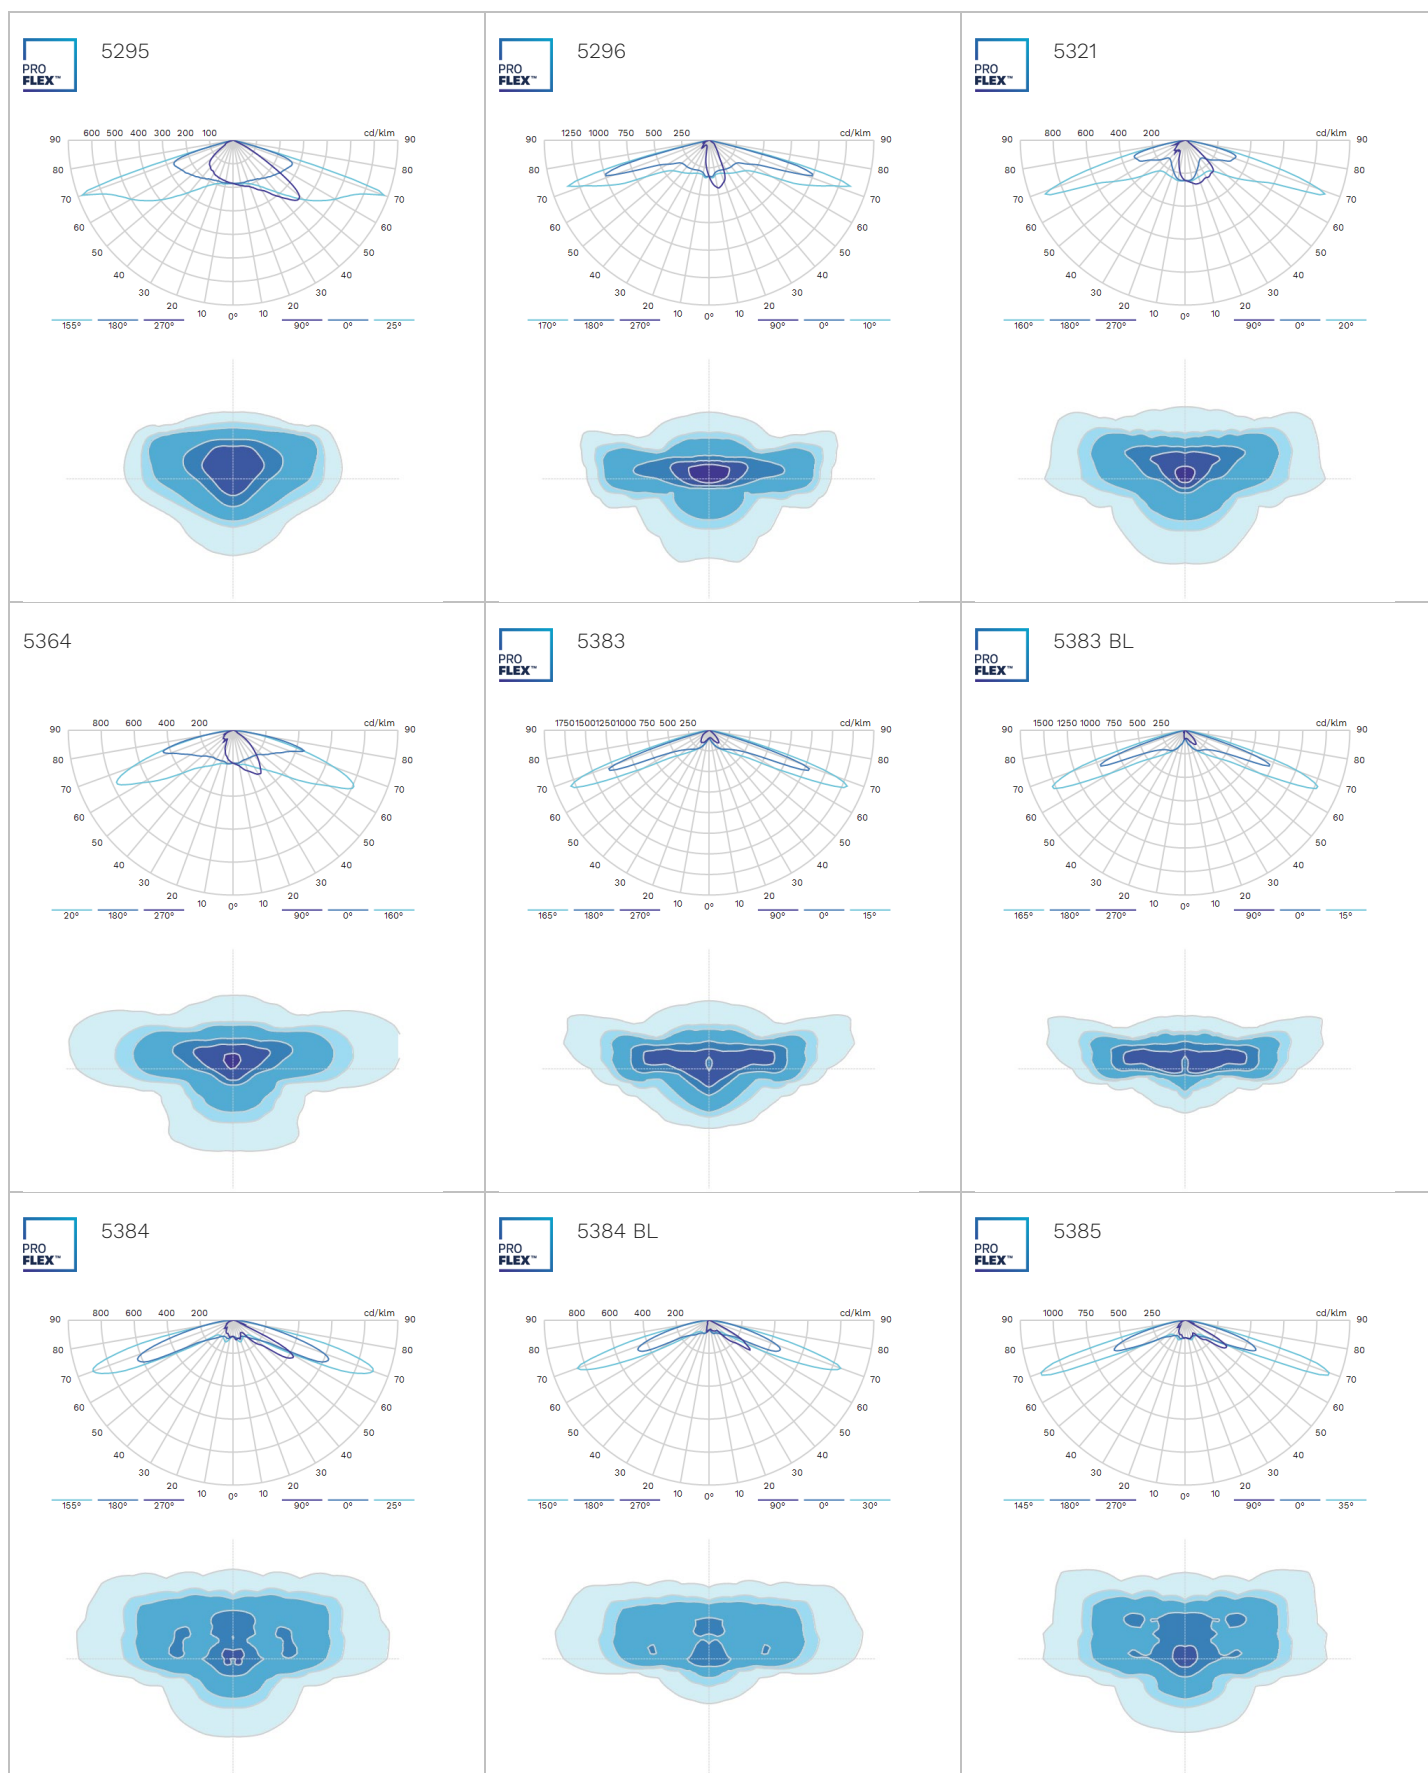



5385 BL

