

OMNISTAR

MICRO / MINI


LED floodlighting solution



OMNISTAR-MICRO



OMNISTAR-MINI

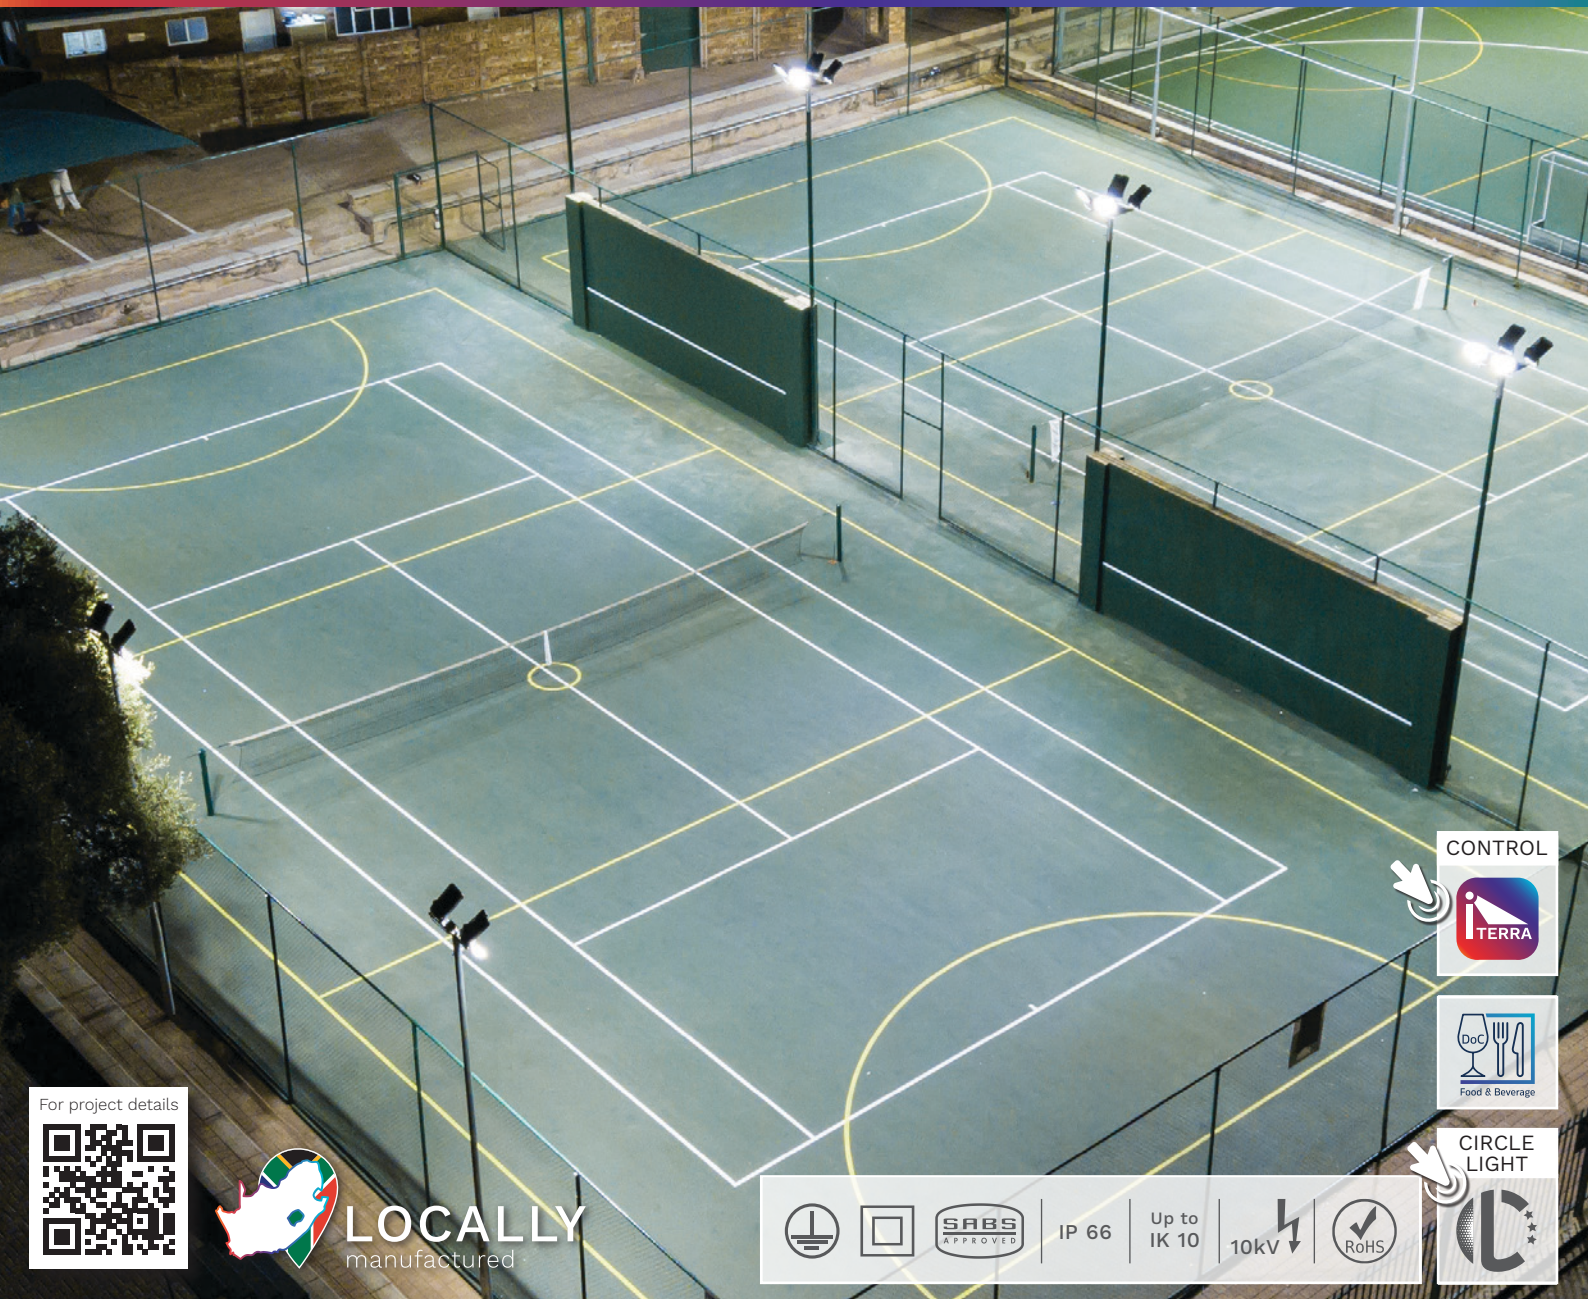

For project details



LOCALLY
manufactured

			IP 66	Up to IK 10	10kV		
--	--	--	-------	-------------	------	--	--

CONTROL

CIRCLE LIGHT

Key advantages

- Designed and manufactured in South Africa
- Highly efficient and energy saving
- White light with a high colour rendering index
- Designed to operate LED light sources of up to 116W without reducing the useful lifetime of up to 100 000 hours, at a lumen depreciation of not more than 5% (L95B10)
- Ta of up to 45°C
- Slim, aesthetical design optimised for LED characteristics
- Designed to replace conventional HID and CFL floodlight luminaires
- Easy to install
- Surge protection 10kV/10kA
- Circular economy 3-star rating
- 5-year warranty (Terms and conditions apply)

Characteristics

GENERAL INFORMATION

Testing standard	SANS 60598, SANS 62262, SANS 475	
Housing	Marine grade high-pressure die-cast aluminium (EN 1706 AC-44300)	
Protector	Glass	High-impact polycarbonate (optional)
Housing finish	Unpainted aluminium	
Aerodynamic resistance (CxS)	MICRO: 0.09m ²	MINI: 0.113m ²
Standard mounting	Stirrup enabling adjustable inclination on-site	Pole mounted (optional)
Nominal voltage	198-264V – 50Hz	
Surge protection	10kV / 10kA	20kV / 20kA (optional for MINI only)
Operating temperature range (Ta)	-35°C up to +45°C	

OMNISTAR	MICRO	MINI
Wattage (up to)	81W	116W
Nominal flux (up to)	10,500lm	16,660lm
Luminaire output flux (up to)	8,715lm	13,828lm
Luminaire efficacy (up to)	129lm/W	133lm/W
Colour temperature	4000K (Neutral white 740); 5700K (Cool white 757) CRI ≥70	
Lifetime of the LEDs @Tq 25°C	100,000h - L95B10	
Lifetime of the Driver @Tq 25°C	100,000h ≤10% failure rate	



WAREHOUSE



INDUSTRIAL HALL



INDUSTRIAL HARBOUR



LOADING BAY



RECREATIONAL SPORT



AREA



FAÇADE



SIGNAGE

Case Study: 150W MH Comparison




Specifications

No. of poles: 4
Tennis court playing area:
 24m x 11m
Height: 8m

Comparing a 150W MH to an OMNISTAR-MINI recreational tennis court installation


The OMNISTAR-MINI provides a 51% energy saving compared to a 150W metal halide luminaire, while fully meeting the required light level requirements.

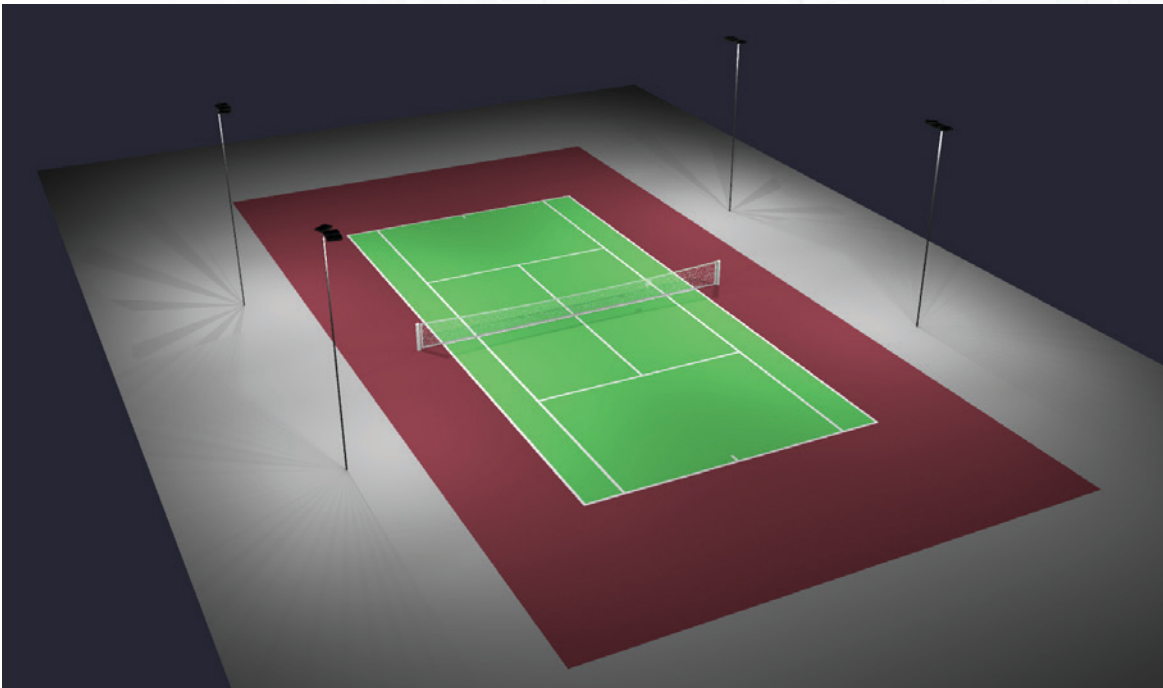

	Luminaire fitted with 150W Metal Halide Lamp (3 per 8m pole)	OMNISTAR-MINI 116W (2 per 8m pole)
Luminaire power consumption (W)	157	116
Average illuminance (lx)	91.33	135.98
Min/Avg uniformity	0.76	0.63
Power consumption per installation (W)	1,884	928

Detail on lighting design comparison available on request.

Energy Savings



(*) Optic 1440, optimised design based on specifications

BEKA Schröder

Experts in lightability™

SABS
ISO 9001



www.beka-schreder.co.za

Designed and manufactured by BEKA Schröder (Pty) Ltd



LOCALLY
manufactured

2024-12

Copyright © BEKA Schröder (Pty) Ltd – 13 West View Road – Olifantsfontein (South Africa) • The information, descriptions and illustrations herein are of only an indicative nature. Due to advanced developments, we may be required to alter the characteristics of our products without notice. As these may present different characteristics according to the requirements of individual countries, we invite you to consult us.