


Austube **Schröder**


Experts in lightability™

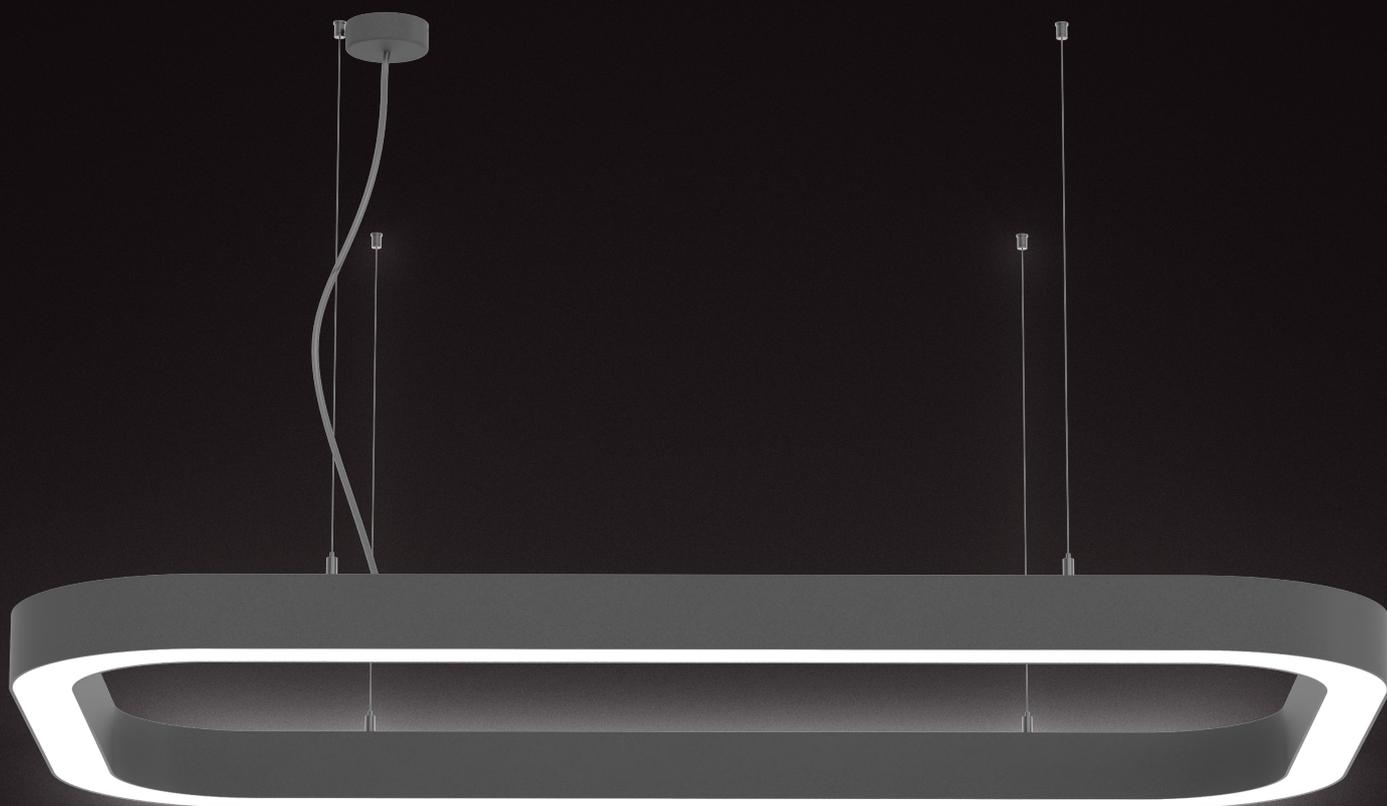

CONTOUR LINE – 60 RECTANGULAR

A rectangular luminaire with inbuilt driver

CONTOUR LINE – 60 RECTANGULAR

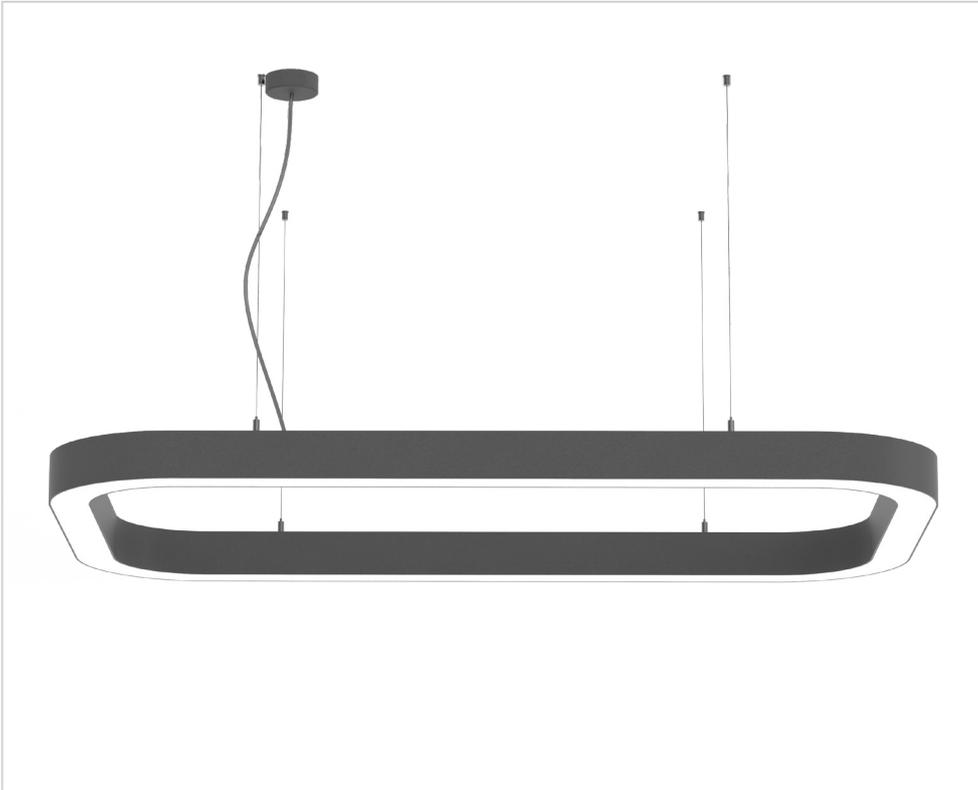

Versatile rectangular luminaire with rounded corners - designed for both suspended and surface mounting, this elegant luminaire blends effortlessly into any space with its smooth, contoured design. Featuring high-performance LEDs (3 MacAdam steps) and an integral driver with adjustable current selection, it delivers up to 90lm/W (CRI80) with a long lifespan of 75,000 hours (L90 B10). The PolyLED diffuser ensures uniform, spot-free illumination. Backed by a minimum 7-year warranty for lasting performance and peace of mind.



Base System:

High grade aluminium extrusion

Light Engine:


Custom board with LED package, quality European drivers as standard

Optics:

High performance PolyLED diffuser with no visible spotting and uniform appearance

Mounting Options:

Surface Mounted, Wire Suspended, Rod Suspended

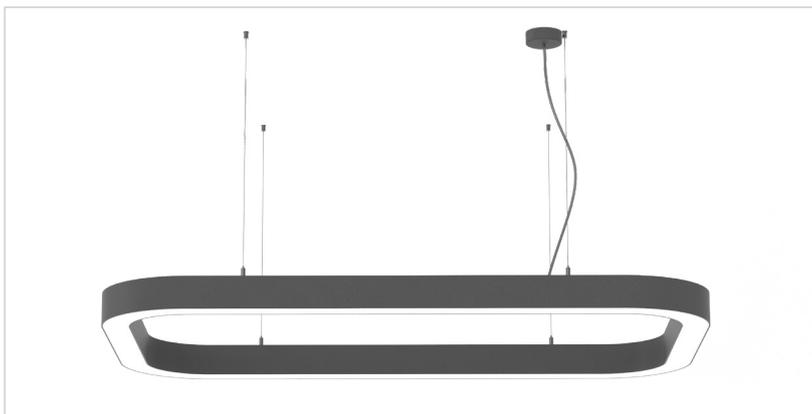

KEY ADVANTAGES

- High grade aluminium extrusion
- SELV LED Engine
- High performance PolyLED (PC) with no visible spotting and uniform appearance

GENERAL INFORMATION

Installation type	Surface Mounted, Wire Suspended, Rod Suspended
RCM Mark	Yes
Certifications	AS/NZS/IEC 60598, ROHS

HOUSING AND FINISH

Housing	High grade aluminium profile Finish: Natural Anodised or Powder Coated
Gear tray	High grade extruded aluminium profile
Light distribution	Direct
Optics/Diffuser	PolyLED (PC)
Tightness level	IP20

PERFORMANCE

Lumen output	6570-12230 lm
Efficacy (lm/W) up to	90

OPERATING CONDITIONS

Operating temperature range (Ta)	0°C up to +40°C (Dependant on application)
----------------------------------	---

ELECTRICAL INFORMATION

Electrical class	Class I / Class II (available on request)
Nominal voltage	198-264V – 50Hz
Power factor (at full load)	> 95%
Surge protection (kV)	Mains surge capability (between L/N – PE) 2kV Optional 10kV with stand-alone SPD
LED Engine	SELV
Control protocol(s)	Fixed Output, DALI, 1-10V, Switch Dim/ Touch Dim/ Push Dim/ Casambi
Control options	Based on application and design architecture

OPTICAL INFORMATION



LED colour temperature	Standard: 3000K, 4000K Optional: 2700K, 5000K, 6500K, Tuneable white 2700K-6500K, RGBW
Colour rendering index (CRI)	>80 Optional: >90
Standard Deviation Colour Matching (SDCM)	3 MacAdam Steps

RATED LUMEN MAINTENANCE

L90 B10 = 75000 hours

DIMENSIONS AND MOUNTING

Product	Part number (non-dim)	Part number (DALI)	Dimensions	Canopy Dia.	Power Cable	Suspension Points
Contour Line 600x1200	60CONTOURL6012	60CONTOURL6012DA	L600xW1200 R250	75	1	4
Contour Line 1200x2400	60CONTOURL1224	60CONTOURL1224DA	L1200xW2400 R250	75	1	4

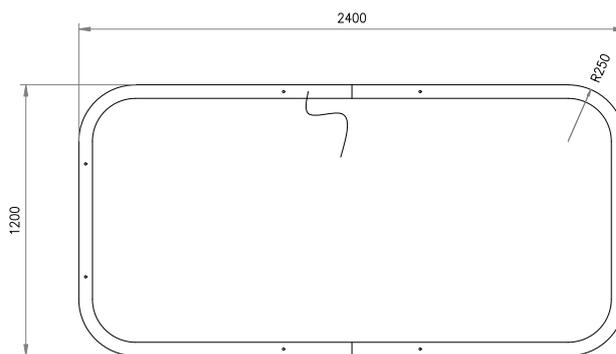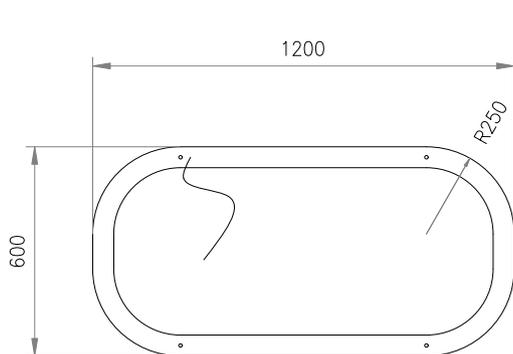

PERFORMANCE

Product	Lumen output (lm)	System Power (W)	Efficacy (lm/W)
Contour Line 600x1200	5670	63	90
Contour Line 1200x2400	12230	137	90

Note: The above output values are 'delivered' lumens. This takes into consideration the optical efficacy of the luminaire. Above values are based on 4000K colour temperature and 25° C ambient temperature.

TO SPECIFY

Versatile rectangular luminaire with rounded corners - designed for both suspended and surface mounting, this elegant luminaire blends effortlessly into any space with its smooth, contoured design. Featuring high-performance LEDs (3 MacAdam steps) and an integral driver with adjustable current selection, it delivers up to 90lm/W (CRI80) with a long lifespan of 75,000 hours (L90 B10). The PolyLED diffuser ensures uniform, spot-free illumination. Backed by a minimum 7-year warranty for lasting performance and peace of mind.